

HANDLES – L & T STYLES

LEVER HANDLE • Disc Tumbler



1000 Series LEVER HANDLE

Disc Tumbler

Can be Masterkeyed
For Metal or Wood Application

Material: Pressure Cast Handle,
Steel Zinc Plated Spindle

Operation: Furnished for one, two,
or three point locking, right or left
hand doors, with 90 or 180 degrees
rotation
(90 degrees RH regularly furnished)

• 90 degree RH handles rotate
counter clockwise from 12 to
9 o'clock

• 90 degree LH handles rotate
clockwise from 12 to 3 o'clock
• 180 degree handles are reversible
for RH or LH doors

Key is removable in locked or
unlocked position for either 90 or
180 degree handles


Cam Positioning: Square spindle
allows cams to be mounted at 12, 3,
6, and 9 o'clock.

Rods and Guides: Not furnished
Spindle Length: Regularly furnished
25/32" and 3 1/2" long (measured
from back of escutcheon).

Also available in 1/4" increments
from 1" to 3 1/2"

Surface Mounting: In addition
to mounting shown, handles are
available with attaching holes
through face of escutcheon for
surface mounting - 1 1/2" c. to c.,
countersunk for #10-32 screws.
When ordering, suffix S to number
(1000S). Screws not furnished.

Rekeying: Plug removal access hole
added to shank of handle allows for
removal of plug assembly for
rekeying purposes. To remove plug,
insert key and rotate 90 degrees.
Insert small tool (e.g., paper clip)
in access hole and depress retainer
while pulling key and plug out of
handle.

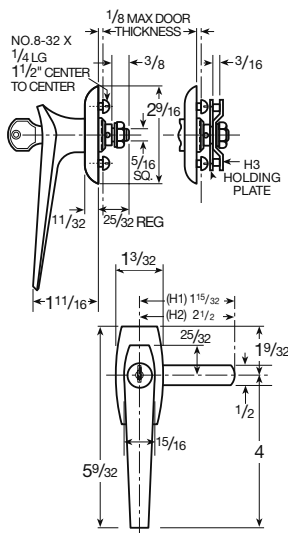


Part Number	Function	Material		Key Changes	Key Blank No.	Masterkeyed Key Changes	Key Blank No.
		Handle	Spindle				
1000	Locking Handle	Pressure Cast	Steel, zinc plated	200	5865JVR	180	5860KS
1000A	Operating Handle, non-locking	satin chrome finish		700	8658JVR	700	5861KS
1000B	Rigid Handle, non-operating	US26D					


Part No/Hand	Stock ID No.	MKYD	Spindle Length	US2G	US26D	Stock Qty.	Approx. Boxed Wt. lbs./ oz.
1000 - RH CAT 60 Lever	00586		25/32"		•	10	5/10
1000 - RH KA-CAT45 Lever	02653		3 1/2"		•	10	5/10
1000 - RH CAT 60 Lever	02368		3 1/2"		•	10	5/10
1000 - RH or LH		2.23	X		•		
1000A - RH Lever Non-locking	00587		25/32"		•	10	5/10
1000A - RH Lever Non-locking	02369		3 1/2"		•	10	5/10
1000A Non-locking			X		•		
1000AS Surface non-locking		-	X		•		
1000B Non-locking rigid			X		•		
1000S		2.23	X		•		
H1-US2G	00074			•			
H1				•			
H2-US2G	00075			•			
H2				•			
H3-US2G	00076			•			
H3				•			
S14441				•			
S14452				•			
S14271				•			

X = Spindle for metal applications standard length is 25/32". Other lengths available 1" up to 3 1/2", at additional cost.


CAMS FOR USE ON BOTH THE 1000 AND 1001



Cam No. H1 and No. H2
SPECIFY CAM REQUIRED
Packed 10 per Box



Holding Plate No. H3
Packed 10 per Box



Cam No. S14271