


HANDLES – L & T STYLES

disc tumbler handle locks

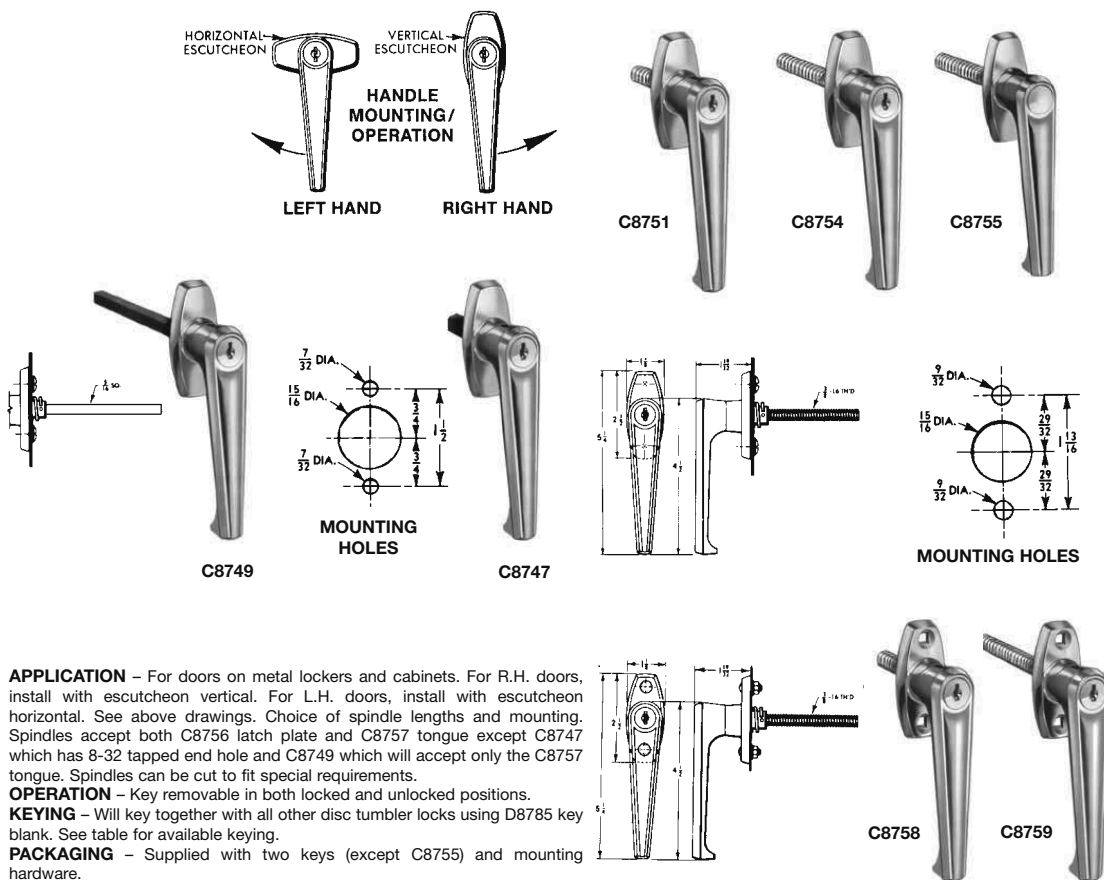

APPLICATION – For doors on metal lockers and cabinets. For R.H. doors, install with escutcheon vertical. For L.H. doors, install with escutcheon horizontal. See above drawings. Choice of spindle lengths and mounting. Spindles accept both C8756 latch plate and C8757 tongue except C8747 which has 8-32 tapped end hole and C8749 which will accept only the C8757 tongue. Spindles can be cut to fit special requirements.

OPERATION – Key removable in both locked and unlocked positions.

KEYING – Will key together with all other disc tumbler locks using D8785 key blank. See table for available keying.

PACKAGING – Supplied with two keys (except C8755) and mounting hardware.

Part No.	Type of Mounting	Spindle Length	Direction of Turn to Open	KA* Codes	Key Changes KD	Case Qty	Reference Number	Non MK Key Blank
C8747-26D	Rear	1" **	90° c/cw	1	200	10	M4-0428-420	D8785
C8749-26D	Rear	4" †	90° c/cw	1	200	10	M4-0428-293	D8785
C8751-26D	Rear	1"	90° c/cw	3	200	10	M4-0428-620	D8785
C8754-26D	Rear	3"	90° c/cw	3	200	10	M4-0428-684	D8785
C8755-26D††	Thru-the Escutcheon	3"	90° c/cw	—	—	10	M6-0429-684	—
C8758-26D		1"	90° c/cw	3	200	10	M4-0294-620	D8785
C8759-26D		3"	90° c/cw	3	200	10	M4-0294-684	D8785


*Key Codes used: 1 Code – C415A.

3 Codes – C413A, C415A and C420A.

**5/16" sq. spindle w/ 8-32 tapped end hole.

†5/16" sq. spindle

††Non-Locking Handle.

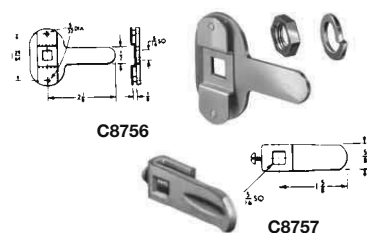

LATCH PLATE & TONGUE FOR ABOVE HANDLE LOCKS

Part No.	Description	Method of Attachment to Spindle	Case Quantity	Reference Number
C8756-2C	3 Point Latch Plate with Tongue, Used with Locking Bars	Hex Nuts with Lock Washers Threaded on Spindle	25	M3-6931-001
C8757-2C	Single Point Latch Tongue	Side Mounted Set Screw	25	H2-0082-003