

MULTI-POINT LOCKS – 2 & 3 POINT

No. 5611-82X*R&L

This 3-point latch is designed for lightweight metal or wood doors. With its simplified all-steel construction, it is easily attached by means of screws, bolts, rivets or welding. The center case has detents for positive open and close positioning.


The rods are easily attached or removed without tools; with the rod in a horizontal position, simply place the hole in the flat end of the rod over the pins in the center case, swing the rod to a vertical position and attach the rod guides.

Available in right- or left-hand. Specify when ordering.

For use with a variety of handles having a 5/16" shank.

Finish: Zinc-plated
Weight: 2 lbs. each


No. 5611-R

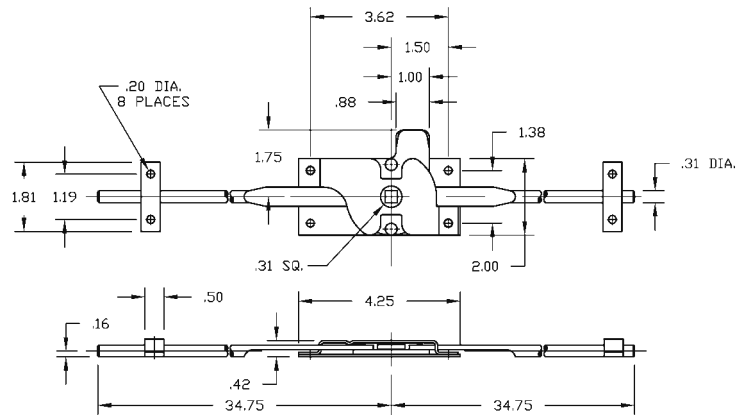


*82X Indicates 4 sets per box.

No. 1-5646-54

Rod guide assembly for 5/16" diameter rod with spring to reduce rattle. Zinc finish.

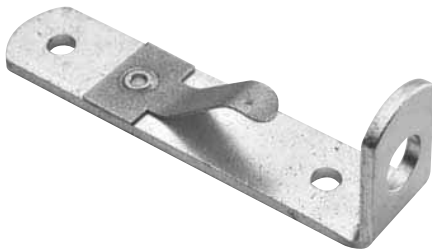

No. 1-5646-54

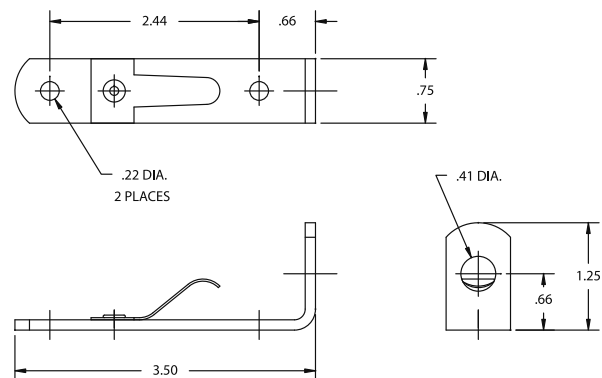

No. 5646-54

