



MISCELLANEOUS SECTION RODS

No. 16556
.156" dia. threaded
rod with bend.
Available in zinc.

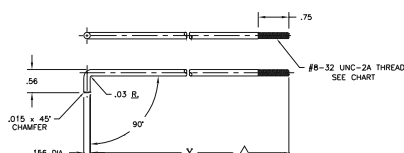

PART NUMBER	X	DEVELOPED	THREADS
16556-AR	3.08	3.551	RIGHT HAND
16556-BL	12.89	13.366	LEFT HAND
16556-CL	13.92	14.392	LEFT HAND
16556-DL	19.65	20.131	LEFT HAND
16556-FL	1.53	2.001	LEFT HAND
16556-FR	1.53	2.001	RIGHT HAND


No. 16682
36" rod with
.16" dia. And a
bend. Available
in zinc finish.

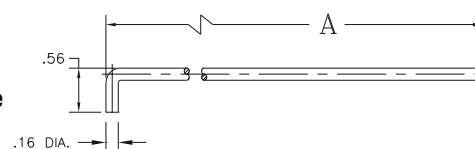


No. 1-16682
48" rod.

No. 2-16682
23.68" rod.


No. 16720-3
Straight connecting rod with
zinc finish to be used with
the Power-Up™ system.
Zinc-plated.




No. 1-16720-3
Bent connecting rod with
zinc finish to be used with
the Power-Up™ system.
Zinc-plated.



No. 16832-48
48" rod with
.31" dia., nylon
roller and offset.
Available with
zinc finish.
Several lengths
available.

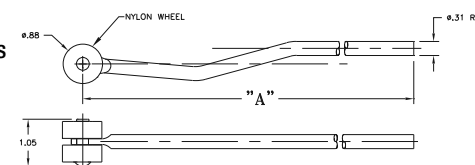


No. 5611-5X
.31" dia. straight rod
with .26" dia. hole.
Available in plain or zinc.

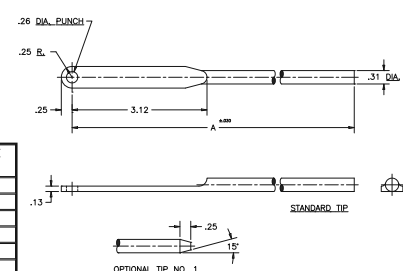


PART NO.	A	TIP STYLE	AVAILABLE FINISHES
5611-5X	34.00	STD	(25)
16273	48.00	STD	(25)
16498	29.44	STD	(25)
16620	20.866	STD	(25)
16625	6.00	STD	(25)
16633	39.00	STD	(25)

No. 16771
.31" dia. Rod with
nylon roller, offset,
and .26" hole.
Available in
zinc finish.
Several lengths
available.

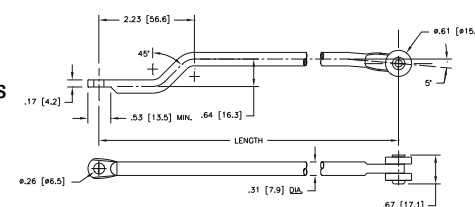

No. 6902-9
.375" dia. straight rod with .26" dia. hole.
Available in zinc.

PART NUMBER	BLANK LENGTH	A	B	C
6902-9	48.38	48.00	3.00	.312
1-6902-9	36.38	36.00	3.00	.312
2-6902-9	4.44	4.31	1.50	.250
3-6902-9	28.81	28.69	1.50	.250
4-6902-9	28.56	28.44	1.50	.250

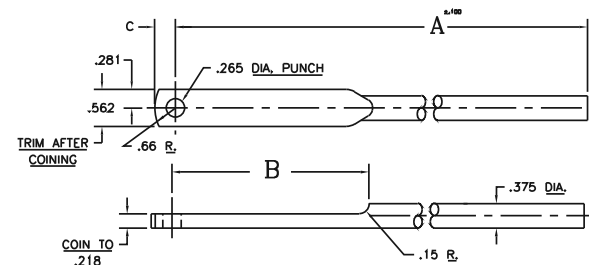

No. 5658-2X
Flat rod with offset, with .328" dia.
hole. Available in zinc.

PART NO.	DEVELOPED LENGTH	A	B	C
5658-2X	32.91	---	32.69	NO HOLE
16586-5	31.66	30.69	31.44	.266 DIA.
1-5658-2X	37.47	36.50	37.25	.266 DIA.
2-5658-2X	33.85	32.88	33.63	.266 DIA.
3-5658-2X	44.91	---	44.69	NO HOLE
7-5658-2X	48.22	---	48.00	NO HOLE
13-5658-2X	37.97	---	37.75	NO HOLE

