


SAFETY SLAM LATCHES

No. 3-106

**THIS PRODUCT IS NOT
CERTIFIED FMVSS 206**

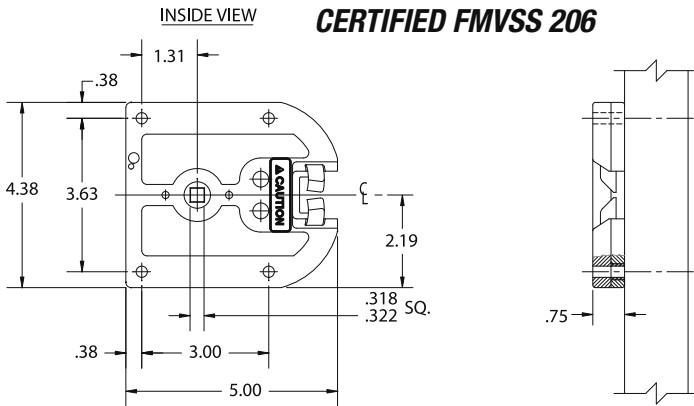


No. 3-106

Less striker.
Weight: 2.4 lbs.

No. 3-106-U

Is supplied with
No. 16489 striker.
Weight: 2.62 lbs.

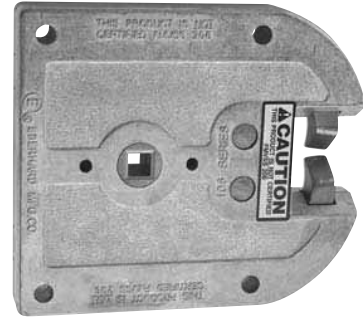



No. 3-106 Compartment Latch mechanism has been designed specifically to fit compartment applications where durability and smooth functional performance are required.

Striker **No. 16489** is provided to allow for mounting in a reduced envelope. The **No. 206-15** striker may also be used. Use **No. 106-U**.

Latch can be surface-mounted on the inside of door panel or between outer and inner door skins. The enclosed strike area mechanism protects against damage by foreign objects.

The **No. 3-106** can be used in conjunction with any of our handles which have a 5/16" square shank.

550 SLAM LATCH

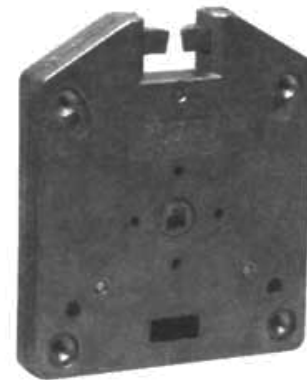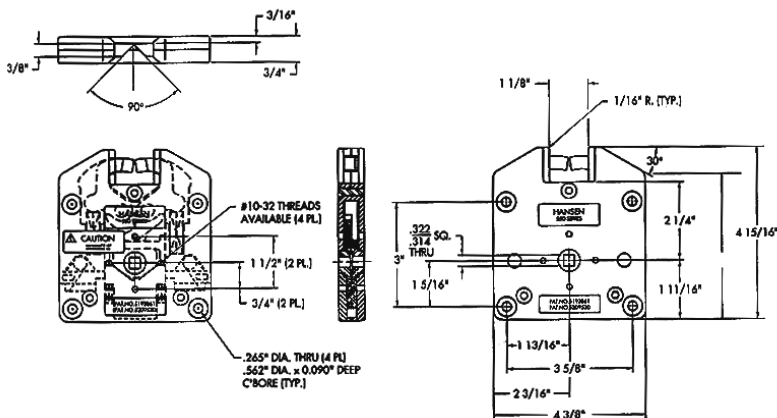

Simplified internal construction provides for a long service life. Lightweight yet durable.

Materials: Aluminum and Powder Metal
Available With: Optional Cam for Remote Actuation with Cables or Rods
Use With: #79L D-Ring (or any other handle with a rotating 5/16" square shank) and either a #551-S (Zinc Die-cast with Yellow Dichromate) or a #552-S (Phosphorous Bronz) strikers
For Use On: Small to medium compartment doors

*Not designed for passenger door use.

Industrial Hardware Distributors, Inc.

620 Spicer St., Akron, OH 44311 • 800.824.1864 | 3415 S.W. 6th St., Ocala, FL 34474 • 800.682.8900
www.industrialhwe.com