

MULTI-POINT T-LATCHES

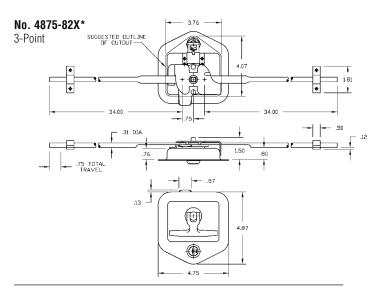

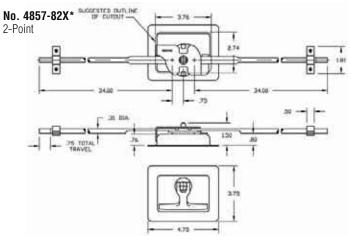

No. 4875-82X*

Dead bolt latch for compartment or cabinet doors has a folding handle with a concealed stainless steel spring which holds handle in folded position.

The shank is offset for mounting the latch close to edge of door.

Both the 2-point and 3-point key-locking versions are delivered with cylinders attached and two keys furnished. The key actuates the bolt which slides into the notch in the circular plate.

After opening the door, the key can be turned to the locked position. Then when the door is closed and the handle again turned, the locking bolt will drop automatically into the locked position.

The center case is installed in a simple cutout (near the edge of door, if desired) and attached by bolts, screws or welding.

Available in 16", 18", 34" & 48" rods



Shown center case for No. 4876-82X*, is No. 16-4876-52 2-Point Key-Locking

Uses key cylinder No. 15621-KC



Shown center case for No. 4857-82X*, is No. 4857-51X

No.	Options	Variations	Weight
4857-82X*	Non-Key-Locking	2-Point	2.43 lbs.
15-4857	Same as 4857-82X	Four 11/64" mounting holes on 3-3/16" x 3" centers	2.38 lbs.
15-4857-SSU	Same as 15-4857	Bright polished stainless steel	2.40 lbs.
18-4857-50	Wider Raised Rod Guide	Hole center line 2-3/16" with 27/64" offset	.89 lbs.
4871-82X*	Same as 4857-82X*	3-Point	2.43 lbs.
8-4871-SS	Same as 4871-82X*	Stainless steel with 6 mounting holes	2.43 lbs.
4875-82X*	Key-Locking	3-Point	2.56 lbs.
16-4875-SSU	Bright polished stainless steel	Stainless steel and four 11/64" mounting holes in 3-7/8 x 3-5/16	2.56 lbs.
4876-82X*	Key-Locking	2-Point	2.56 lbs.
16-4876-82X*	Same as 4876-82X	Four 11/64" mounting holes on 3-7/8" x 3-5/16" centers	2.68 lbs.
16-4876-SSU	Bright polished stainless steel	Same as 16-4876-82X* except stainless steel	2.68 lbs.
19-4876-52	_	Center case with (4) 1/4-20 x 1/2 mounting studs	2.75 lbs.

^{*82}X Indicates 4 sets per box.