


MULTI-POINT LOCKS – 2 & 3 POINT

No. 4-2525-UR


Furnished standard with (2)
48" long double reinforced
welded rods.

Other versions available.
Left-Hand Opposite

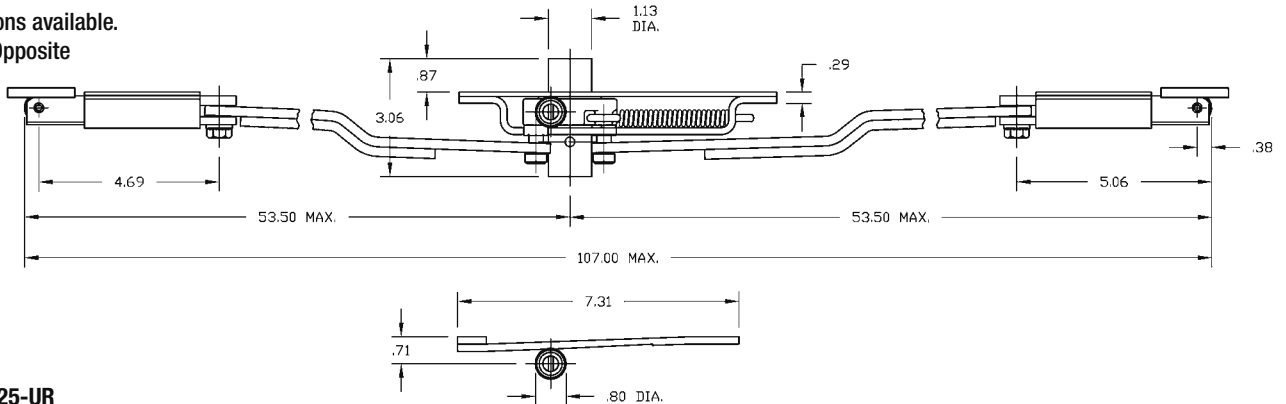


No. AL5-2525-UR

Furnished with
(2) aluminum rods
and end bolts.

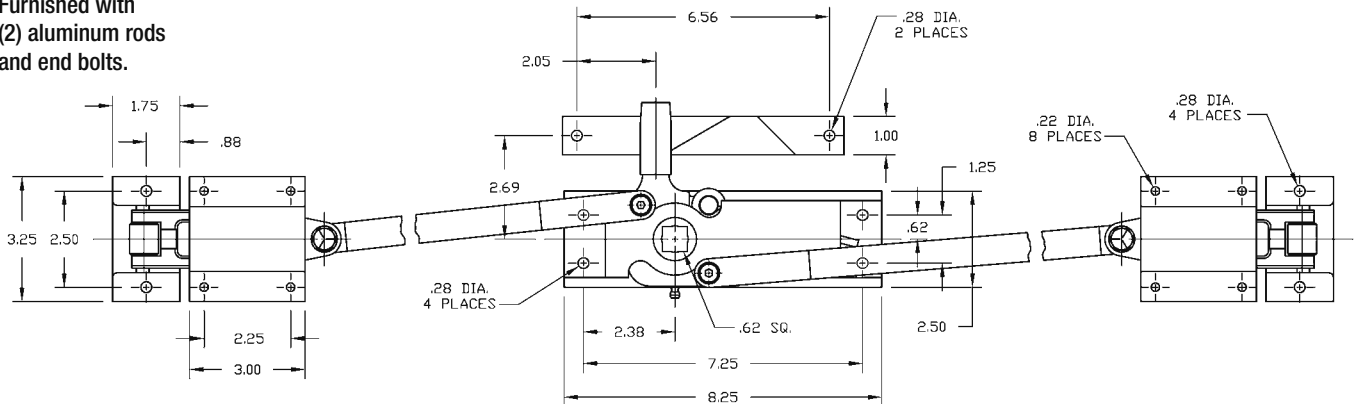

No. 4-2525-50R&L

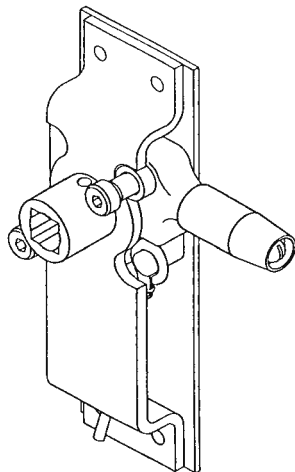

Optional Center Cases for Series 2525 Roller Latch. Other combinations available.

No. 4-2525-50R&L is the most commonly used center latch. The inside handle is attached easily by centering over hub and attaching two bolts. The stainless steel roller extends outward 2-5/16". The latch has (4) .28" dia. mounting holes, is spring-loaded and designed to be used with an inside release.

Finish: .0003 cadmium with yellow chromate per QQP416 Type II, Class II.
Weight: 3.35 lbs.