


SPRING BOLTS – FINGER PULL LATCHES

No. 2100

Sturdy all metal construction with slotted mounting holes for easy adjustment. Choice of threaded or hex receptacle actuator for use with authorized tool. Actuator can be extended through latch to accept handle on inside. Easy to mount and assemble. Just screw or bolt latch to that section and insert threaded actuator into latch, securing with jam nut as required. Meets specifications of Canadian Standards Association (CSA) requirements. Available with zinc-plated or E-coat.



No. 2100

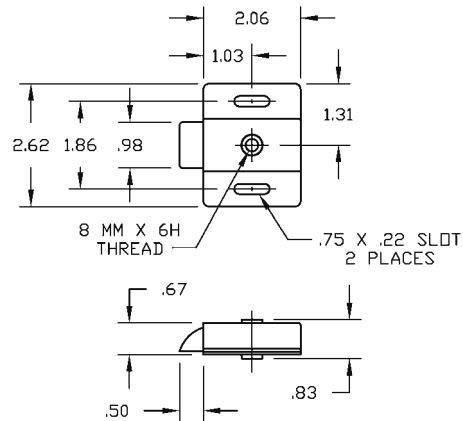

No. 2100 threaded drive 8 x 1.25 mm

No. 2100-H hex drive 6 mm hex


No. 2-2100 1/4-20 threaded drive

No. 2200-H reverse bolt

Weight: .34 lbs.

No. 5620

Malleable iron strike.

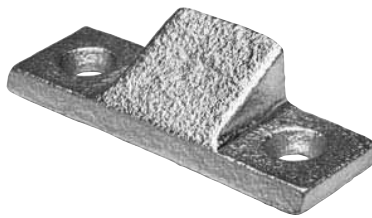


Finish: Zinc-plated
Weight: .13 lbs.

***Part No. 5619-A and 5620** strikers can be used with any of the Eberhard paddle slam latches or end bolts.



No. 5620

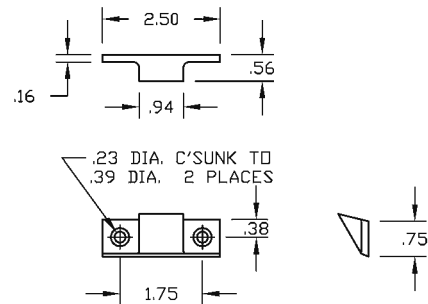

No. 5619-A


Has both a long primary catch and a shorter secondary catch.

Also available in stainless steel as request quote ref. No. 5619-SSA.

Finish: Zinc-plated



No. 5619-A

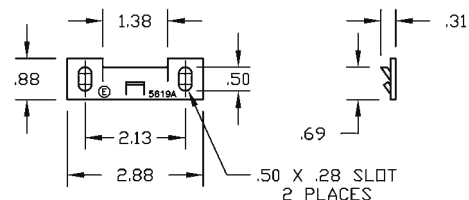

No.	Variations	Weight
5619-A	With slots	.06 lbs.
5619	Without slots	.06 lbs.