

COMPRESSION LATCHES

No. ECL-530-KP8 Patented (Key-Locking)

All Eclipse Series latches fit the same size cutout.
Low profile appearance.

Weight: .24 lbs.


Finish: Matte Black (MB)
Matte White (MW)

No. ECL-530 Nonlocking with gasket.

No. ECL-530-P8 Nonlocking with gasket, mounting bracket, screws.

No. ECL-530-K Key-locking with gasket.

No. 1ECL-530-KP8 Same as ECL-530-KP8 except includes stainless steel scallop.

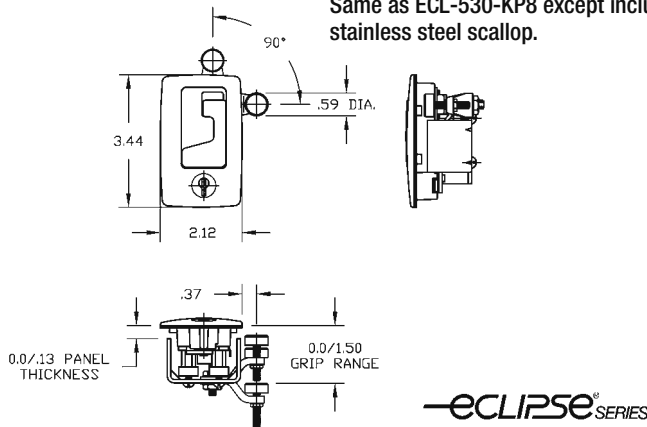

Features & Benefits

The Eclipse® lift & turn latches feature unique take-up capability, up to 1/8" compression. This enables the door gasket to be compressed against the door when temperature, noise or vibration are important considerations. The lift & turn latches also offer an adjustable bolt depth for shallow or deep-fitting doors. Up to 1-1/2" adjustment is available.

Installation is fast with the use of the mounting bracket and (2) screws, which are provided. No external fasteners. No weld marks to mar finish. Eclipse latches can be assembled on finished panels. An oil-resistant flange gasket is also provided.

Materials

The lift & turn housing and handle are made of thermoplastic alloy. A polycarbonate-based polymer blend provides high strength, light weight and excellent heat and chemical resistance. It resists crazing and hardening. All metal stamping is made of 300 Series stainless steel. Key cylinder is zinc die cast.

- Key-locking version is furnished with 2 keys.
- Oil-resistant O-ring can be provided around barrel hub attached to handle to meet NEMA specifications. Available as request quote.

Finish: Matte Black (MB)
Matte White (MW)

No. ECL-830-KP8 Patented (Key-Locking)

Weight: .33 lbs.


No. ECL-830-P8 (Nonlocking)

Finish: Matte Black (MB)
Matte White (MW)

Features & Benefits

The Eclipse® lift & turn latches incorporate a rubber grommet which swells into a doughnut shape when the handle is folded into the recessed housing. In the compressed state, the grommet is larger than the hole in the strike. So, it effectively "locks" the panel until the handle is lifted, relaxing the grommet and allowing it to pass through the strike hole. This latch is very useful when temperature, noise or vibration are important considerations. Installation is fast with the use of the mounting bracket and (2) screws, which are provided. No external fasteners. No weld marks to mar finish. Eclipse latches can be assembled on finished panels. An oil-resistant flange gasket is also provided.

No. ECL-830-SS19 Striker

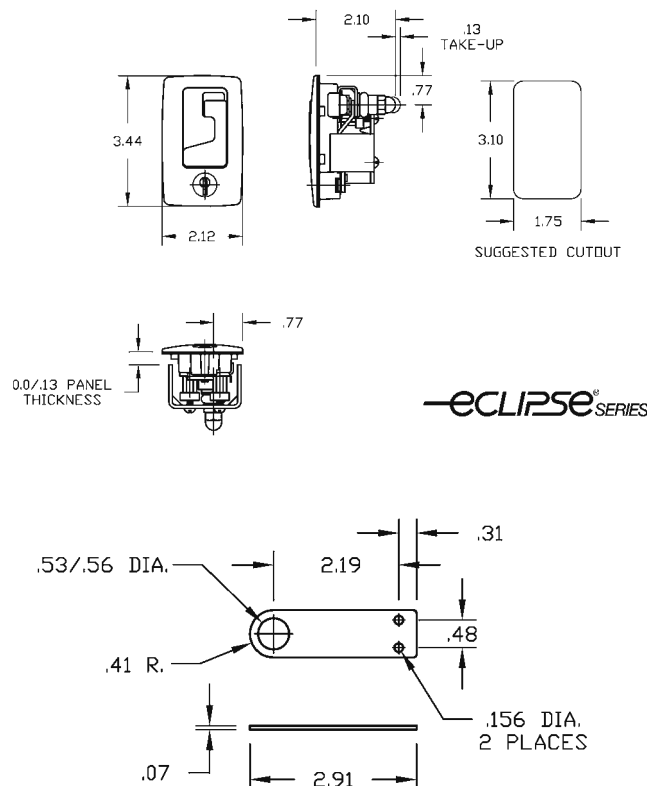

Industrial Hardware Distributors, Inc.

620 Spicer St., Akron, OH 44311 • 800.824.1864 | 3415 S.W. 6th St., Ocala, FL 34474 • 800.682.8900
www.industrialhwe.com