## **MULTI-POINT SLAM LATCHES**

This smooth-acting, slam-type latch is intended for use on all types of compartment doors on farm equipment enclosures, stationary equipment and machine tool cabinets.

The recessed pan permits flush installation: simply cut an appropriate hole and attach by screws, bolts or welding. This latch is especially suited for installation in tight quarters because the overall thickness is only 1-9/16".

This simple, inexpensive unit is normally supplied with rods, which

connect to the end bolts. However, it can be adapted for use with cable to provide greater flexibility in application or rotaries for more secure fit.



Furnished with one key (the key-locking versions). No. 4973-82X and No. 4975-P9 and the non-key-locking versions, respectively.


No. 3-4982-92X, No. 3-4973-82X, No. 3-4974-P9 and No. 3-4975-P9

Same as above, except with four 11/64" dia. mounting holes in center case on 3-11/16" x 3-3/4" centers.

No. 34-4974-51 with quarter-turn knob.

Finish: Zinc-plated, bright polished stainless steel



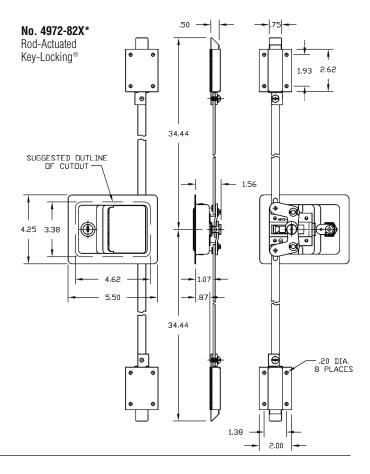

## No. 4974-52U

End bolt is standard for assemblies using cable. The attachment point has a cable clamp and is furnished with a 7 lb. spring. **No. 4972-58U** end bolt is standard for assemblies using rod and is furnished with a 7 lb. spring.

## **Component Parts Used in Latch Kits**

| No.         | Description  |
|-------------|--|
| 4972-5      | 30" rod used in 4972/4973  |
| 4972-58U    | End Bolt s/a used in 4972/4973   |
| 4972-52     | Less washer and bolt   |
| 4974-52U    | End Bolt s/a used in 4974/4975   |
| 565698-5    | 36" cable with fitting   |
| 3-4972-SS51 | Stainless steel paddle handle only with mounting holes set up for rods key-locking |
| 3-4973-SS51 | Same as 3-4972-SS51 except nonlocking  |
| 3-4974-SS51 | Same as 3-4972-SS51 except for cable   |
| 3-4975-SS51 | Same as 3-4973-SS51 except for cable   |

<sup>\*82</sup>X indicates four sets per box.

## No. 4974-52U

