


ROTARY LATCHES AND STRIKERS

No. 240-R&L

The Mini Rotary™ Latch from Eberhard gives you the benefits of either two-stage or single-stage rotary action for even the most confined areas. It is ideal for small hoods, lids, doors and panels, and has a maximum rated load strength of 750 lbs. The Mini Rotary Latch is available in three different models, which can be unlocked in any of three different directions to meet a wide range of applications. The latch's low-profile design and light weight allow it to be easily mounted using two 1/4" bolts. Optional mounting brackets are available for added flexibility (No. 16592).

241 Series is same as the 240 Series except with single-stage action.



No. 240-R Patented

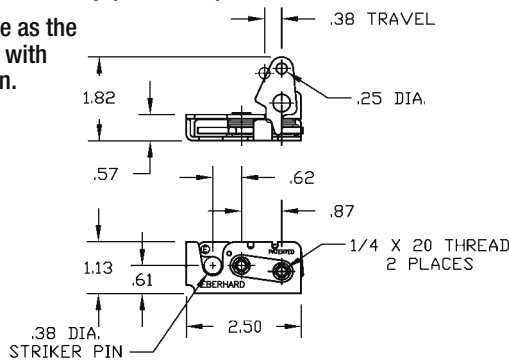

No. 8-240-R&L

A Mini Rotary is ideal for small applications. Available in a standard finish of zinc-plated or stainless steel (No. 8-240-SSR&L) both with Everlube latch pawls. Available in single stage (No. 8-241) can be used with .38" dia. striker (No. 240-52U).

Note: 241 Series same as 240 except single stage.

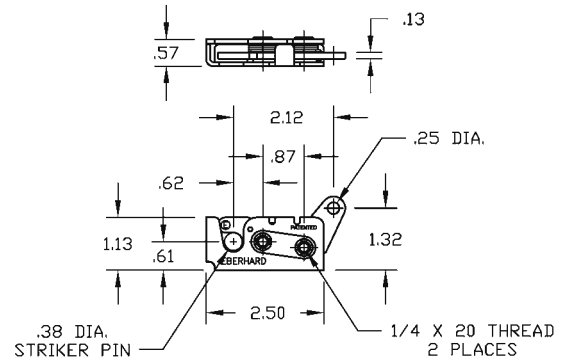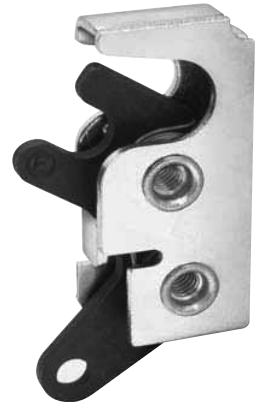

No. 1-240-R&L

is the same as Part No. 240 R/L except for different lever arm. Available in single stage (No. 1-241), stainless steel housing (No. 1-240-SSR&L/241-SSR&L), or carbon steel zinc-plated which is standard.

No. 11-240-R&L


Dual stage Mini Rotary is designed with a lever arm for two different remote actuation points. Standard finish is a zinc-plated housing with Everlube latch pawls. Available in single-stage (No. 11-241-R&L). Can be used with a mounting bracket (No. 16592) or a .38" dia. striker (No. 240-52U).

No. 12-240-SSR&L


Entire rotary is made out of 300 Series stainless steel and has a release lever that measures 4.30".




No. 1-240-R

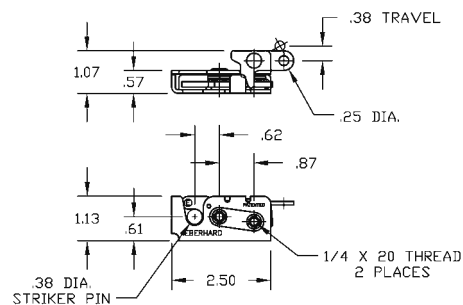

No. 11-240-R Patented

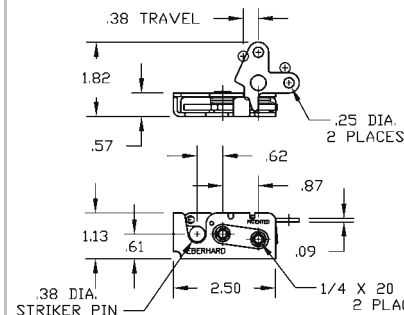

No. 12-240-SSR Patented

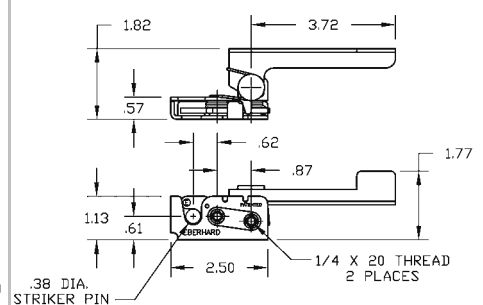

Industrial Hardware Distributors, Inc.

620 Spicer St., Akron, OH 44311 • 800.824.1864 | 3415 S.W. 6th St., Ocala, FL 34474 • 800.682.8900
www.industrialhwe.com