SPRING BOLTS - FINGER PULL LATCHES

No. 5597

Ideal for drawers and small cabinets. Four standard holes can be furnished: 7/32" dia. on 1-1/8" x 1-1/4" centers.

Weight: .25 lbs.

Finish: All finger pulls are furnished zinc-plated.

No. 3-5597

Same as No. 5597 except slide bolt bevel is reversed.

No. 6-5597

Same as No. 5597 except has mounting holes.

No. 8-5597


Same as No. 3-5597 except has mounting holes.

No. 31-5597

Same as No. 5597 except with 6 weld studs, plated after assembly, and 9.7 lbs. Spring Rate.




No. 5597



6.7 lbs. Spring Rate


No. 8-5597



6.7 lbs. Spring Rate

No. 14-5597


Finger pull reversed, 6.7 lbs. Spring Rate, reversed bolt, mounting holes.



6.7 lbs. Spring Rate

No. 15-5597


Finger pull, 2.6 lbs. Spring Rate, mounting holes.



2.6 lbs. Spring Rate

SPRING BOLTS - FINGER PULL LATCHES






No. 25-5597-U

4 mounting holes with reversed bolt, nut and washer (bolt and nut shipped loose).

2.7 lbs. Spring Rate


No. 2-5598



No. 2-5598

4 mounting slots that measure .22" x .50" and a finger pull that has a length of 4.00".

No. 565692-U

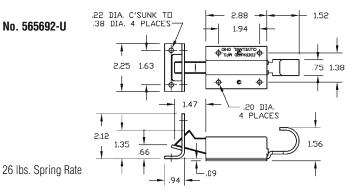

No. 565692-U

Includes No. 565692-50 finger hook latch and No. 565694-10 striker.


A simple, sturdy, spring-loaded latch that may be used independently or in conjunction with other latches (No. 565694-82X); supplied with a steel strike with holes for No. 10 screws.



No. 565697

Flush-Type Steel Latch Bolt

25 lbs. Spring Rate



No. 565697

Same as Part No. 565692-U except has a standard 45° bolt.

No. 11-565697


Same as 565697 except with reversed bolt.

No. 17-565697

With 7 lb. spring.

No. 18-565697

With 7 lb. spring with reversed bolt.




SPRING BOLTS - FINGER PULL LATCHES

No. 2-565697

Same as No. 565697 except it has an offset steel latch bolt.

No. 2-565697

Offset-Type Steel Latch Bolt 25 lb. Spring




25 lbs. Spring Rate

No. 17-565699-52XU

4 mounting holes .20" dia. and a 30° bolt (washer and bolt shipped loose).

No. 17-565699-52XU




15 lbs. Spring Rate

No. 38-565699-S52U

6 mounting holes .28" dia. and a 45° bolt (washer and bolt shipped loose).


No. 38-565699-S52U




15 lbs. Spring Rate

No. 4974-52U

4 mounting holes .20" dia. and a 45° bolt (washer and bolt shipped loose).



No. 4974-52U



7 lbs. Spring Rate