


ROTARY LATCHES AND STRIKERS

No. 1-400-R

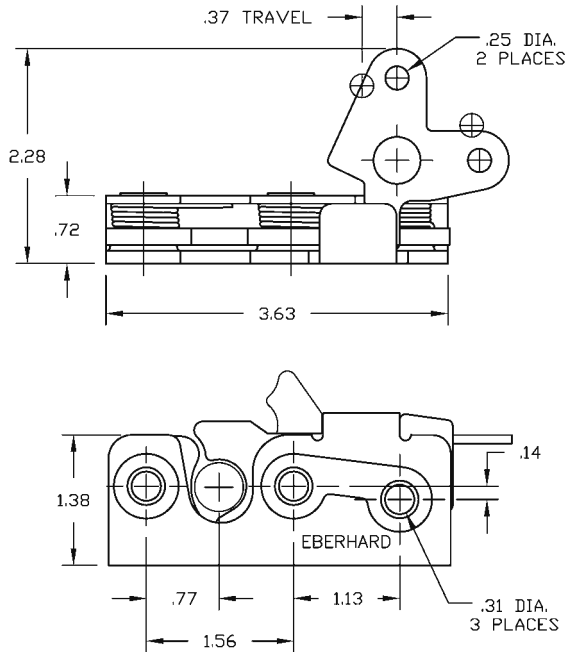

No. 1-400-R&L

Right-hand shown.

Has two holes in actuator arm for attaching remote latching points.

NOTE: Rotary Latch is available with 1/4" x 20 UNC threaded inserts. Specify when ordering (i.e. IT-400 R).



No. 400-R&L Rotary Latch

These are two-stage latches, with both primary and secondary latching capabilities with one remote attaching point.

Meets FMVSS 206 Standards for personnel restraint applications. To comply with the FMVSS 206 Standards, the appropriate latch must be used in conjunction with Eberhard striker assembly

No. 2T-400-52 and a certified FMVSS door system.


Multipoint systems are available.

Finish: Zinc-plated with black coated pawls for improved lubricity and corrosion resistance.

No. 3-400 R&L Rotary Latch

Same as 1-400 except lever arm has only one .264 dia hole.

No. 450-R

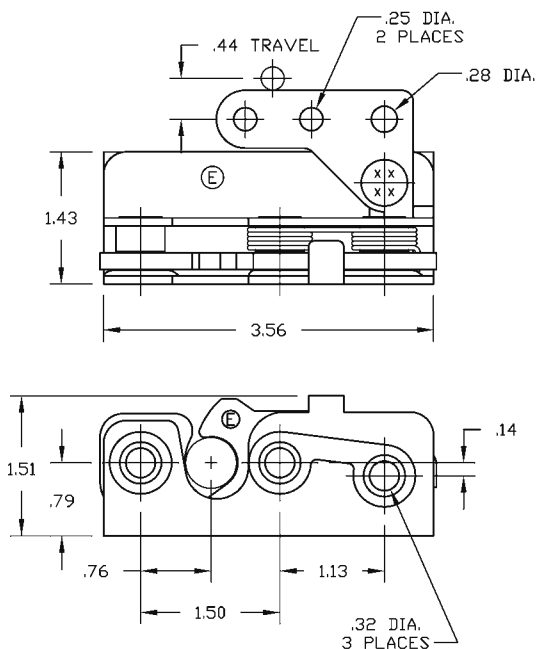

No. 450-R&L

No. 450 R&L Series rotary latches offer actuator position located below the striker entry level. This latch is ideally suited for those installations where No. 400 series rotaries cannot be used due to lever arm actuator position.

Meets FMVSS 206 Standards for personnel restraint. To comply, the appropriate latch must be used in conjunction with Eberhard striker assembly.

No. 2T-400-52, and .312 dia. grade 8 bolts for installation. Latch pawls have an Everlube finish for corrosion protection and lubricity; the outside housing is zinc-plated.

Weight: .57 lbs. (Left-hand shown.)

Options: The 450 rotary latch series is available with 1/4" x 20 UNC threaded inserts. Specify when ordering (**No. T-450-R**).

