


MULTI-POINT T-LATCHES

No. 8000-R&L


Single-point lock with adjustable latch for varied door thicknesses; concealed stainless steel spring holds handle in folded position. The off-center shank permits mounting the lock close to the edge of the door. Welded support bracket adds rigidity to the shank and prevents the cam from unwanted flexing. Suitable for use on fiberglass, steel or wood doors. Installed by screws, rivets or welding.

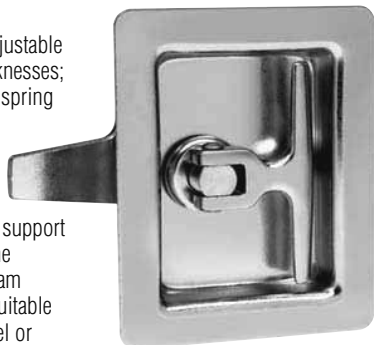

Left-Hand Opposite

Finish: Zinc-plated, bright polished stainless steel
Weight: 1.06 lbs.

No. 8000-L

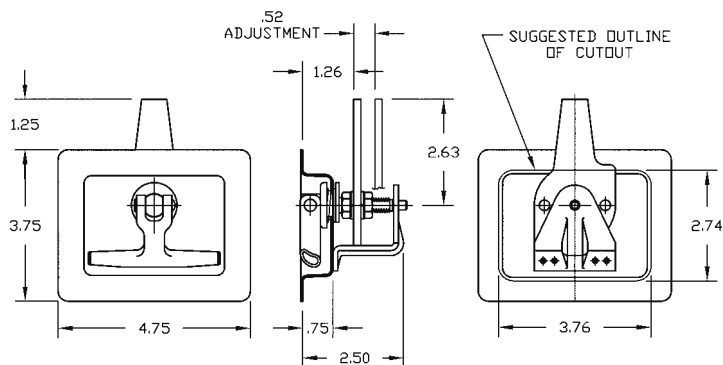

No. 2-8000-R&L

Same as 8000 R&L except has four 11/64" dia. mounting holes on 3-3/16" x 3" centers.

No. 2-8000-SSR&L

Same as above. Receptacle is supplied in 300 Series stainless steel.

No. 10-8000-7

Gasket available for flange 1/16" thick neoprene material.

No. 11-8000-R&L

Bent Cam

No. 17-8000-R&L

Same as 12-8000-R&L except has four 11/64" dia. mounting holes.

No. 2-8000-XR&L

Same as 2-8000-R&L except has four .21" dia. mounting holes.


No. 12-8000-R&L

Same as 8000 R&L but with beveled cam for ease of latching.

No. 14-8000-R&L

Same as 8000 R&L except O-ring installed in handle to prevent water leakage.

No. 6-8000-R

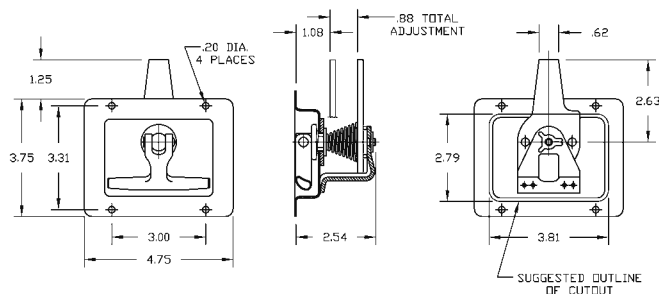

Left-Hand Opposite

No. 6-8000-R&L

Non-Key-Locking



- Continuously adjustable latch takes up slack as seal wears or collapses with age.
- The T-handle is help up or in the folded position by a concealed stainless steel spring.
- Allows greater freedom in manufacturing tolerances since the pawl and strike relation is not critical.
- Ideal for fiberglass which cannot accept slam locks.
- Offset latches available on request.
- Gasketed models for severe moisture or dust conditions. Gasketing also reduces electrolysis when mounted to aluminum skins.
- Mounting holes or blind mounting provided to customer specifications.
- **No. 6-8000-R** standard non-key-locking carbon steel.
- **No. 6-8000-SSR** bright polished stainless steel.
- Flange Gasket **No. 10-8000-7** 1/16" thick neoprene material (order separately).

Finish: Zinc-plated or bright polished stainless steel.
Weight: 1.13 lbs.