
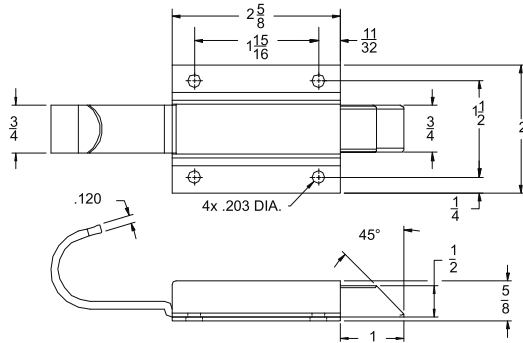


SPRING BOLTS – FINGER PULL LATCHES


90-M FLUSH BOLT

- Stainless steel spring
- Iron powder metal bolt
- ✓ Available in steel construction/zinc finish
- ✓ Available in stainless steel
- ✓ Available with standard or reverse bolt
- ✓ Available with 30° or 45° bolt
- ✓ Available 1" or 5/8" bolt extension on 45° bolt

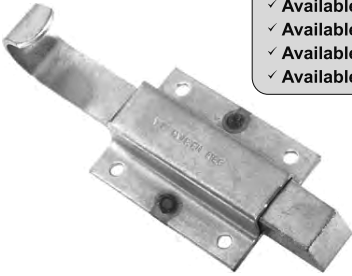


110 FLUSH BOLT

- Steel construction/zinc finish
- Accepts 3/8" rod
- ✓ Available with standard or reverse bolt
- ✓ Available with/without mounting holes

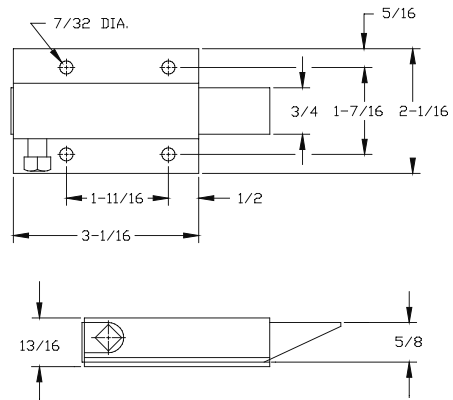


90-M OFFSET BOLT

- Stainless steel spring
- Iron powder metal bolt
- ✓ Available in steel construction/zinc finish
- ✓ Available in stainless steel
- ✓ Available with standard or reverse bolt
- ✓ Available with 30° or 45° bolt

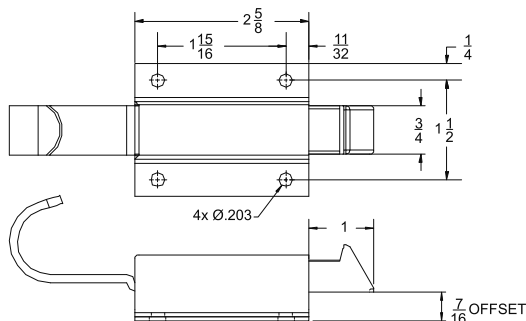

110 OFFSET BOLT

- Steel construction/zinc finish
- Accepts 3/8" rod
- ✓ Available with standard or reverse bolt
- ✓ Available with/without mounting holes

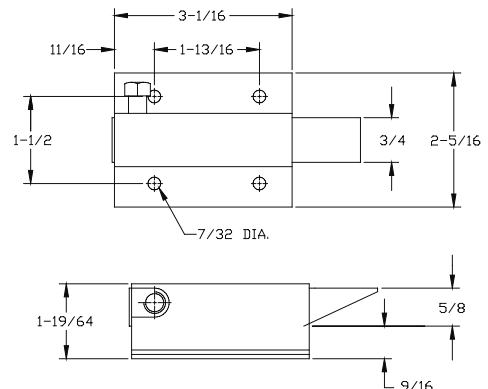


SPRING BOLTS – FINGER PULL LATCHES




120 FLUSH BOLT

- Steel construction/zinc finish
- Accepts 1/4" rod, hook or cable eye
- ✓ Available for 3/8" rod (must specify 114 bolt)

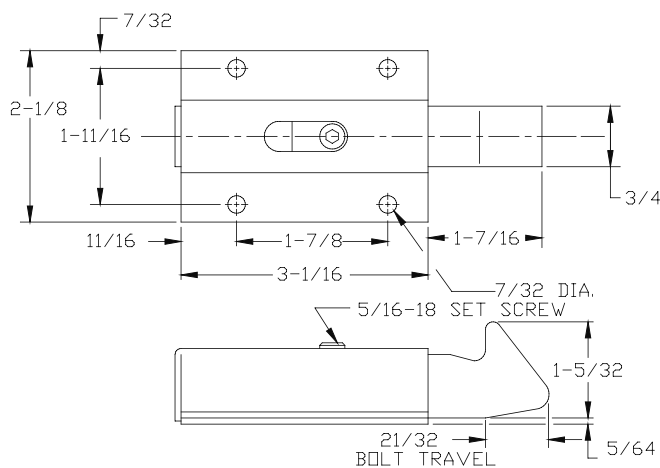

120 OFFSET BOLT

- Steel construction/zinc finish
- Accepts 1/4" rod, hook or cable eye
- ✓ Available for 3/8" rod (must specify 114 bolt)

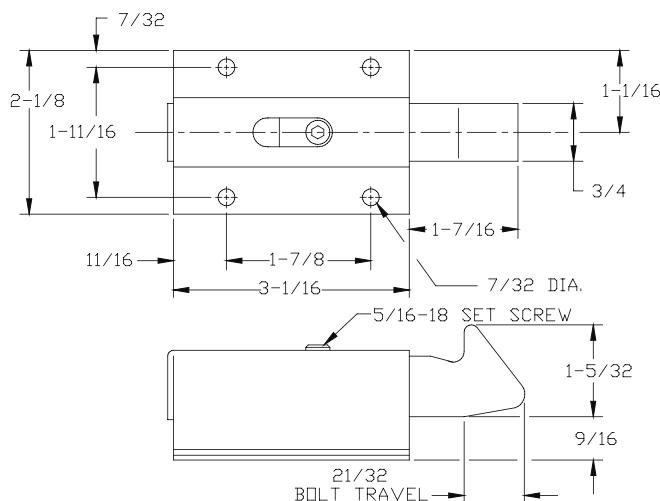

'FIX-THROUGH' SLAM LATCH IN STEEL



9/01186

Special design allows 'fix-through' mounting, to suit narrow door pillars, sections and channels. This is interchangeable with our moulded model (9/01530) but may be preferred where there is possibility of impact loads or lateral stress.

ORDERING CODE

9/01186	'Fix-through' slam latch steel
---------	--------------------------------

Slam bolt retracts fully into case when operated. Slotted bolt-pull provides 'lost-motion' so latches can always be slammed, even when a system is in 'locked' mode.


Fixing by rivets through 7mm holes in case. Use large-headed fasteners to spread load over area.

Bright zinc-plated

SPECIFICATION

A.	Body Length.....	80mm
B.	Max. Width.....	25mm
C.	Max. Height.....	20mm
D.	Projection.....	13mm
E.	Location.....	20mm
F.	Location.....	43mm
G.	Location.....	23mm
H.	Hole diameter.....	7mm
J.	Slot dimensions.....	6x20mm
K.	Knob diameter.....	Ø38mm
L.	Knob height (max).....	20mm

Spring pressure: 5kg to full bolt withdrawal

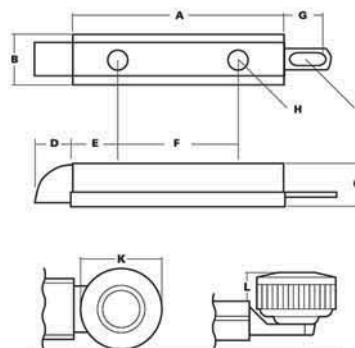

SINGLE POINT SLAM LATCHES

The basic steel latch can be fitted with a large, knurled moulded knob, riveted in position in either 'nose-up' or 'nose-down' styles.



9/01728
'nose-up'

9/01729
'nose-down'


ORDERING CODE

9/01728	Latch & knob, nose-up
9/01729	Latch & knob, down

SPRING BOLTS – FINGER PULL LATCHES


90-S FLUSH BOLT

- Steel construction/zinc finish
- Accepts 1/4" rod hook/cable eye
- ✓ Available for 3/8"

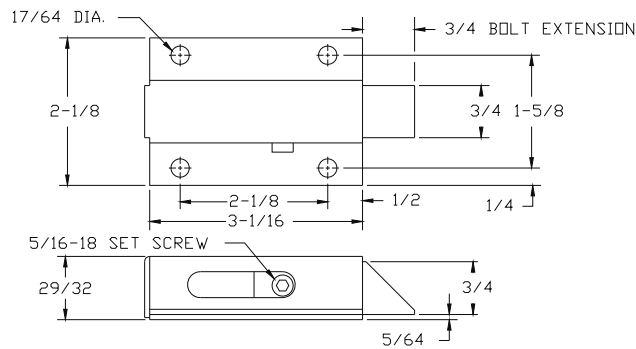


90-S OFFSET BOLT

- Steel construction/zinc finish
- Accepts 1/4" rod hook/cable eye
- ✓ Available for 3/8"

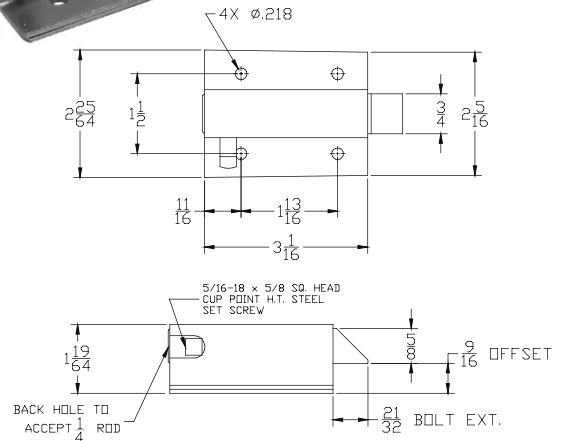

90 FLUSH BOLT

- Accepts 1/4" rod/hook/cable eye
- ✓ Available in stainless steel
- ✓ Available in steel construction/zinc finish
- ✓ Available with heavy duty spring
- ✓ Available for 5/16" & 3/8" rod

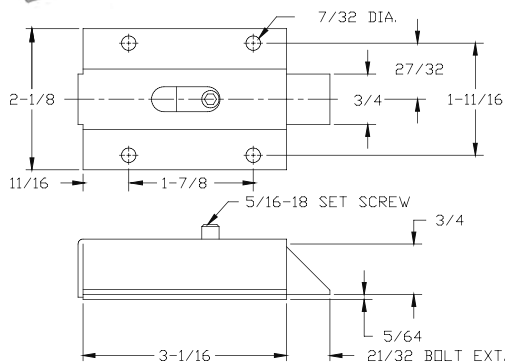

90 OFFSET BOLT

- Accepts 1/4" rod/hook/cable eye
- ✓ Available in stainless steel
- ✓ Available in steel construction/zinc finish
- ✓ Available with standard or reverse bolt
- ✓ Available with heavy duty spring
- ✓ Available for 5/16" & 3/8" rod

