


Telescopic Props

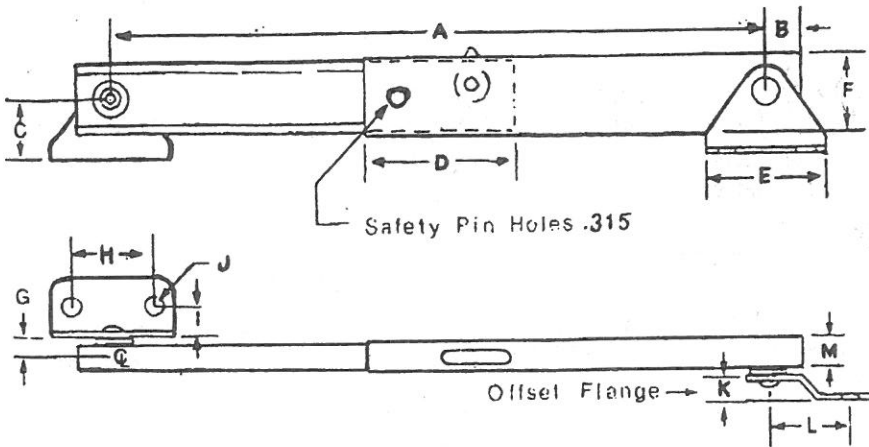

- STORAGE CONTAINERS
- UTILITY BOXES
- TOOL BOXES
- COWLINGS
- HOODS
- AWNINGS
- WINDOWS
- DOORS
- LIDS
- SHELVES
- CABINETS

A. LENGTH, PIVOT POINT TO PIVOT POINT
LATCHED OPEN CLOSED

NOTE: REQUIRES .63" OVERTRAVEL FOR
 LATCHING AND UNLATCHING.

6" PROP	7.25"	4.75"
8" PROP	11.25"	6.75"
10" PROP	15.25"	8.75"
12" PROP	19.25"	10.75"
16" PROP	27.25"	14.75"

B. DIMENSION .62"

C. HEIGHT, 90 FLANGE 1.03"

D. OVERLAP IN LATCHED POSITION 3.5"

E. WIDTH, ALL FLANGES 2.25"

F. HEIGHT, OUTER SLIDE 1.4"

G. DIMENSION, FLANGE TO CENTERLINE .45"

H. DIMENSION, HOLESREAD 1.5"

I. DIMENSION, HOLE LOCATION 5.8"

J. HOLE DIAMETER .343"

K. OFFSET FLANGE, OFFSET .44"

L. OFFSET FLANGE, HOLE LOCATION 1.4"

M. WIDTH, OUTER SLIDE .57"

- Constructed from 16 gauge steel and tested by
 the University of Notre Dame for strength.

- Special Nylon Washers at each flange's pivot
 point for smooth, taut operation.

- Safety pin holes provided in latched position to
 prevent accidental unlatching.

FINISH

Bright Zinc (std.)
 Black Zinc
 Cadum
 Chrome

INDUSTRIAL HARDWARE

620 Spicer St.

Akron, OH 44311

(330) 762-8836 (330) 762-9422 Fax
 (800) 824-1864(OH) (800) 453-3747 (NAT'L)

INDUSTRIAL HARDWARE

3415 S.W. 6th St.

Ocala, FL 34474

(352) 732-4040 (352) 732-6005 Fax
 (800) 682-8900