

ROTARY LATCHES AND STRIKERS

050-0200 Slimline Rotary Latch



This compact single rotor latch is designed for light to medium applications for on or off-highway entrance doors, compartments and access panels. It features a variety of trip levers and mounting axles for ease of mounting and application and is FMVSS 206 compliant.

DESIGNED FOR:

- Thinner, light or medium weight door applications
- Door weights up to 75 lbs. (34 kg)
- Door seal pressures of 20-25 lbs. (9-11kg) recommended for best results (not to exceed 50 lbs. [23 kg])
- Visible surface installation or concealed installation

AVAILABLE:


- Left or right hand configurations (left hand shown)
- With standard .265 diameter "thru" axles as shown or 1/4-20 UNC threaded axles (optional) or M6 x 1.0 threaded axles

MATERIAL:

- Internal latch components: heat treated, smooth edge stamped steel
- Springs: non-corrosive stainless steel
- Case halves: high strength steel

FINISH:

- Zinc plated, clear chromate steel components

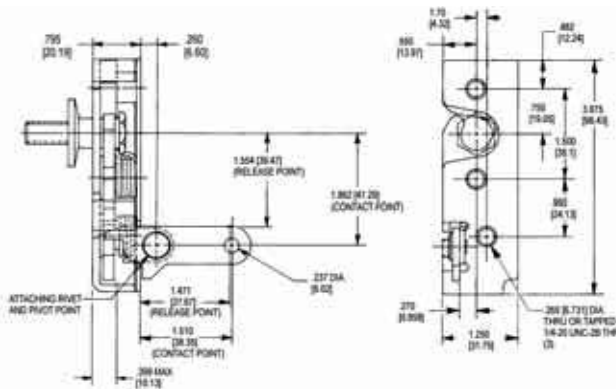

Part No.	Hand	Mounting	Actuation	Actuation Feature
11789-16	RH	1/4-20 UNC Threaded Axles	Conventional Straight, Non-Handed, v02 - 1.25, Stop	No Actuation Feature
11656-16	RH	1/4-20 UNC Threaded Axles	Conventional 2-Point, Non-Handed, Version 01 - 1.25, 0.625 X 1.083, Stop	No Actuation Feature
19353-01	RH	1/4-20 UNC Threaded Axles	Conventional 2-Point, Non-Handed, Version 01 - 1.25, 0.625 X 1.083, Stop	Wave Washer
14047-01	RH	1/4-20 UNC Threaded Axles	Conventional 2-Point, RH Lever, v01 - 1.25, 0.625 X 1.083 X 0.440 Offset	No Actuation Feature
24006-01	RH	1/4-20 UNC Threaded Axles	Conventional 2-Point, RH Lever, v01 - 1.25, 0.625 X 1.083 X 0.440 Offset	Wave Washer
15855-01	RH	1/4-20 UNC Threaded Axles	Conventional L-Shaped, RH Lever, Version 02 - 0.715 X 1.151 X 0.161 Offset	Wave Washer
19007-01	RH	1/4-20 UNC Threaded Axles	Conventional L-Shaped, RH Actuator, 0 X 1.128 X .572 Form	No Actuation Feature
11189-16	RH	0.265 (6.7mm) Diameter Through Axles	Conventional Straight, Non-Handed, v02 - 1.25, Stop	No Actuation Feature
11665-16	RH	0.265 (6.7mm) Diameter Through Axles	Conventional 2-Point, Non-Handed, Version 01 - 1.25, 0.625 X 1.083, Stop	No Actuation Feature
14230-01	RH	0.265 (6.7mm) Diameter Through Axles	Conventional 2-Point, Non-Handed, Version 01 - 1.25, 0.625 X 1.083, Stop	Wave Washer
13746-01	RH	0.265 (6.7mm) Diameter Through Axles	Conventional 2-Point, RH Lever, v01 - 1.25, 0.625 X 1.083 X 0.440 Offset	No Actuation Feature
14230-02	RH	0.265 (6.7mm) Diameter Through Axles	Conventional 2-Point, RH Lever, v01 - 1.25, 0.625 X 1.083 X 0.440 Offset	Wave Washer
15630-01	RH	0.265 (6.7mm) Diameter Through Axles	Conventional L-Shaped, RH Actuator, .625 X 1.000 X .30 Offset, Stop	No Actuation Feature
24907-01	RH	M6 X 1.0 Threaded Axles	Conventional Straight, Non-Handed, v02 - 1.25, Stop	No Actuation Feature
19276-01	RH	M6 X 1.0 Threaded Axles	Conventional 2-Point, Non-Handed, Version 01 - 1.25, 0.625 X 1.083, Stop	No Actuation Feature
24624-01	RH	M6 X 1.0 Threaded Axles	Conventional 2-Point, RH Lever, v01 - 1.25, 0.625 X 1.083 X 0.440 Offset	Wave Washer
11788-01	LH	1/4-20 UNC Threaded Axles	Conventional Straight, Non-Handed, v01 - 1.25, Stop	No Actuation Feature
11788-16	LH	1/4-20 UNC Threaded Axles	Conventional Straight, Non-Handed, v02 - 1.25, Stop	No Actuation Feature
11657-16	LH	1/4-20 UNC Threaded Axles	Conventional 2-Point, Non-Handed, Version 01 - 1.25, 0.625 X 1.083, Stop	No Actuation Feature
19352-01	LH	1/4-20 UNC Threaded Axles	Conventional 2-Point, Non-Handed, Version 01 - 1.25, 0.625 X 1.083, Stop	Wave Washer
14048-01	LH	1/4-20 UNC Threaded Axles	Conventional 2-Point, LH Lever, Version 01 - 1.25, 0.625 X 1.083 X 0.440 Offset	No Actuation Feature
24007-01	LH	1/4-20 UNC Threaded Axles	Conventional 2-Point, LH Lever, Version 01 - 1.25, 0.625 X 1.083 X 0.440 Offset	Wave Washer
14265-01	LH	1/4-20 UNC Threaded Axles	Conventional L-Shaped, LH Lever, v01 - 1.940 X 0.678 X 0.165 Offset, Stop	Wave Washer
11190-16	LH	0.265 (6.7mm) Diameter Through Axles	Conventional Straight, Non-Handed, v02 - 1.25, Stop	No Actuation Feature
14435-01	LH	0.265 (6.7mm) Diameter Through Axles	Conventional Straight, LH Lever, Version 01 - 1.100 X 0.193 Offset, Stop	Wave Washer
11664-16	LH	0.265 (6.7mm) Diameter Through Axles	Conventional 2-Point, Non-Handed, Version 01 - 1.25, 0.625 X 1.083, Stop	No Actuation Feature
14229-01	LH	0.265 (6.7mm) Diameter Through Axles	Conventional 2-Point, Non-Handed, Version 01 - 1.25, 0.625 X 1.083, Stop	Wave Washer
15544-01	LH	0.265 (6.7mm) Diameter Through Axles	Conventional 2-Point, LH Lever, Version 01 - 1.25, 0.625 X 1.083 X 0.440 Offset	No Actuation Feature
14229-02	LH	0.265 (6.7mm) Diameter Through Axles	Conventional 2-Point, LH Lever, Version 01 - 1.25, 0.625 X 1.083 X 0.440 Offset	Wave Washer
15659-01	LH	0.265 (6.7mm) Diameter Through Axles	Conventional L-Shaped, LH Lever, v02 - 0.625 X 1.000 X 0.300 Offset, Stop	No Actuation Feature
24908-01	LH	M6 X 1.0 Threaded Axles	Conventional Straight, Non-Handed, v02 - 1.25, Stop	No Actuation Feature
19275-01	LH	M6 X 1.0 Threaded Axles	Conventional 2-Point, Non-Handed, Version 01 - 1.25, 0.625 X 1.083, Stop	No Actuation Feature
24623-01	LH	M6 X 1.0 Threaded Axles	Conventional 2-Point, LH Lever, Version 01 - 1.25, 0.625 X 1.083 X 0.440 Offset	Wave Washer