

MISCELLANEOUS SECTION

VENTS

774 Vent 4" Butterfly



775 Vent 5" Butterfly

Material: Stamped Stainless Steel
Length: 4"
Width: 4"
Height: 0.630"
Fastener Size: #6
Weight: .16 lb



800 Vent 4-1/2" x 5" Louvered

Material: Stamped Stainless Steel
Product Class: B - Semi-Standard
Fastener Size: #6
Length: 5"
Width: 4-1/2"
Height: 1/4"
Weight: .19 lb



801 Vent 9" x 5" Louvered



810 Vent 5" x 6" Louvered

Material: Stamped Stainless Steel
Fastener Size: #6
Length: 6"
Width: 5"
Height: 0.380"
Weight: .4 lb



820 Vent 9-1/8" x 4-9/16" Louvered



830 Vent 6" x 10" Louvered




Aluminum louvre No. 22

All Aluminum louvre plate for ventilation.
Specifications:
.032 Ga. 12-1/4" wide x 10-1/2" high.
7/32" Dia.
mounting holes
Weight — 1/2 lb.



Roof Ventilator – No. 24

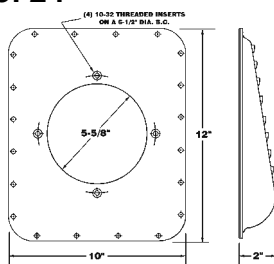

DIMENSIONAL DRAWING

Manufactured of galvanized steel and powder coated as a primer. All welded construction eliminates rattle. Supplied with a unique waterproof baffle plate and drain ports in the corners to allow water to escape. Complete unit includes outside vent body with a 7-1/4" dia. zinc plated steel inside grille and gasket. Can be mounted on roof or front of trailers. Recommended for use on busses, emergency vehicles, horse trailers, truck bodies, tractor cabs and trailer vans.

VENTILATOR COMES COMPLETE WITH GRILLE AND GASKET.

No. 24-001

Zinc plated steel grille with gasket

No. 24-002


Polished stainless steel grille with gasket

No. 24-004


Aluminum grille with gasket

Gasket is closed cell sponge rubber.

Galvanized round screen is also available — **Part No. 24-210**

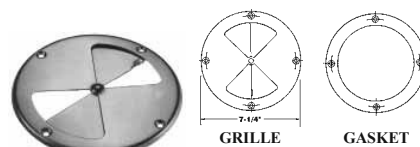

Double Action Side or Cowl Ventilator – No. 1700

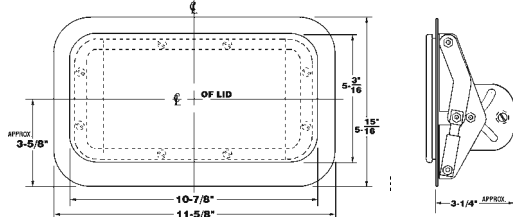

All steel construction. 20 Ga. cold rolled steel. Two way action allows for air intake or air exhaust. Designed for O.E.M. or replacement on trucks, buses, sleeper cabs, farm cabs, poultry bodies, vans and off road equipment. Supplied without holes for welded installation. Holes may be added to mounting flange for riveted or bolt on installation. Supplied with perforated metal bug screen.

Specifications:


Outside Flange — 11-5/8" long x 6-15/16" wide.

Lid (Door) — 5-3/16" wide x 10-7/16" long

Finish — Zinc plated

Weight — 2-3/4 lbs.

Multi-Purpose Ventilators – No. 20

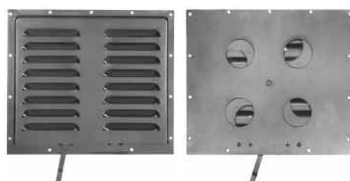

Aluminum vent with closure

This popular aluminum ventilator is supplied with an internal closure to open and close the vent. Just slide the lever to open & close vent. Back has four 2" diameter holes to allow flow of air. Can be used on cargo trailers, horse trailers and dry freight trailers. Front & back are aluminum. Insert is zinc plated steel.

Weight — 1-1/2 lbs. .32 Ga. 12-1/4" x 10-1/2"