



ROTARY LATCHES AND STRIKERS

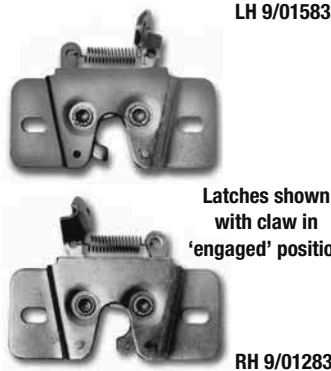

Latches shown with claw in 'engaged' position

ORDERING CODE

9/01283	Claw latch RH, side-mount
9/01583	Claw latch LH, side-mount
9/00724	Pin-striker, 52 mm
9/01246	Pin-striker, 23 mm



SPECIFICATION

A. Length	100mm
B. Height	50mm
C. Width	19mm
D. Location	21mm
E. Hole Centres	76mm
F. Location	30mm
G. Hole Size (diameter)	3mm
H. Hole Sizes	6.5 x 12mm
Maximum force on trigger to release: 2.5kg	
J. Width	51mm
K. Height	35mm
L. Length	51mm
M. Location	32mm
N. Hole Centres	32mm
O. Hole Size (diameter)	5.5 x 9mm
P. Pin diameter	12.5mm
Q. Thickness	3mm

An alternative striker, 9/01246, has K=23mm.
Striker pins are staked and brazed, hardened and plated.

'CLAW' LATCHES SIDE-MOUNT

Extremely versatile units which sit within a compartment and slam against a striker peg to provide a very positive engagement. They release by pressure against top trigger or by remote cable. Used for top-opening hatches and covers where latch is concealed below edge of door or base unit.

Slam-action against pin or loop striker plate. Both 'hands' available as illustrated.

Claw engages with striker and is released by pressure on top trigger or can be operated remotely via cable to hole in trigger plate.

Plant-on fixing through elongated holes in side flanges.

Zinc-plated latch and strikers.

Use with camlocks or handle with appropriate latch bar. 'Turnbutton' lock 9/01875 can release either directly or by remote cable.

Anti-burst properties

When rig-tested these latches can achieve values in excess of 6.0KN transverse load (direct pull). However they must not be used for passenger restraint doors.


ORDERING CODE

9/00263	Claw latch RH, c/w 'buffer'
9/00283	Claw latch RH, no 'buffer'
9/01183	Claw latch LH, no 'buffer'
9/00724	Pin-type striker
3/21787	Moulded 'buffer' only

SPECIFICATION

A. Length	100mm
B. Height	50mm
C. Width	19mm
D. Location	21mm
E. Hole Centres	82mm
F. Location	30mm
G. Hole Size (diameter)	3mm
H. Hole Sizes	7 x 9mm

Maximum force on trigger to release: 2.5kg



9/00263, RH latch, shown in 'open' position with fitted moulded cover (latch only is 9/00283)



'CLAW' LATCHES TOP-MOUNT

Ideal for top-opening compartments, these latches can be mounted on lid or base without danger of injury from sharp edges, while striker can be placed below opening line. Latches can be operated by direct pressure on top 'trigger' or by remote action. Also suit sliding doors and roller shutters.

Plant-on fixing through elongated holes in top flanges.

Zinc-plated latch and strikers. Moulded 'buffer' in black pvc.

