


TIE DOWNS – CARGO CONTROL

TOWING HOOKS

2799, Mini Towing Hook


Drop forged, light duty tow hook.
Maximum working load 10,000 lbs.
Finishes: 2799-B (Black)
2799-C (Chrome)

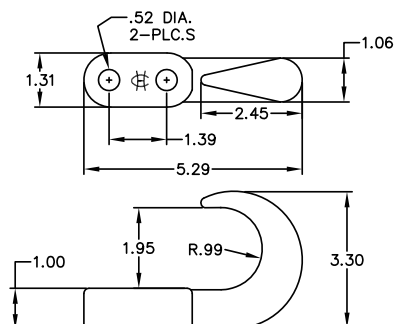

2799

2800-A RH, Towing Hook

Furnished in right and left handed patterns. The 2800-A is one of a series of "Cleveland" Towing Hooks developed to fit a wide range of applications. The 2800-A has two mounting holes. The thickness through the center boss is 1.500". This Towing Hook is drop forged from special bar quality steel, lightweight with exceptional strength. Maximum working load 13,500 lbs.

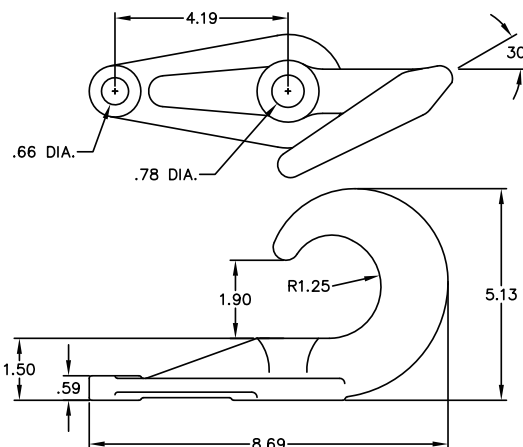


2800-A RH

2801-A LH, Towing Hook

For heavy-duty applications. Available in right and left hand patterns. This Towing Hook has two mounting holes. The Hook is supported by an exceptionally long bearing surface. Thickness through the center boss is 1.562". Drop forged special bar quality steel gives excellent strength to weight ratio. Maximum working load 44,600lbs.

Note: Maximum working loads are given for use with SAE Grade 8 Fasteners. "Do Not" use a lesser grade fastener unless the maximum working load is reduced proportionally. This pertains to all Towing Devices shown in this catalog.

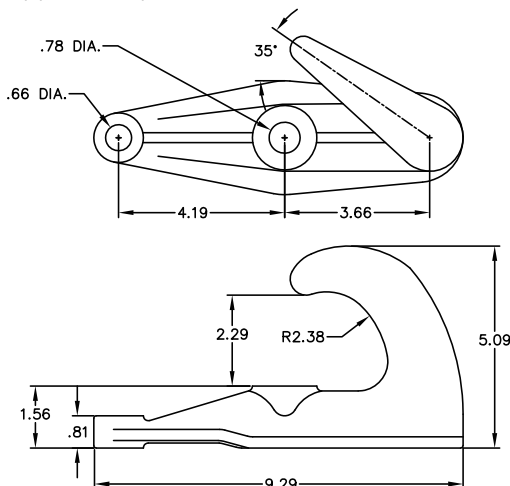

2801-A LH


TIE DOWNS – CARGO CONTROL

TOWING HOOKS

2801-C LH

2801-C LH, Towing Hook


This heavy duty application Tow Hook is furnished in right and left hand patterns. The **2801-C** has three mounting holes and features a short overall length of 6.437". Drop forged of quality-controlled steel. Maximum working load 42,500 lbs.

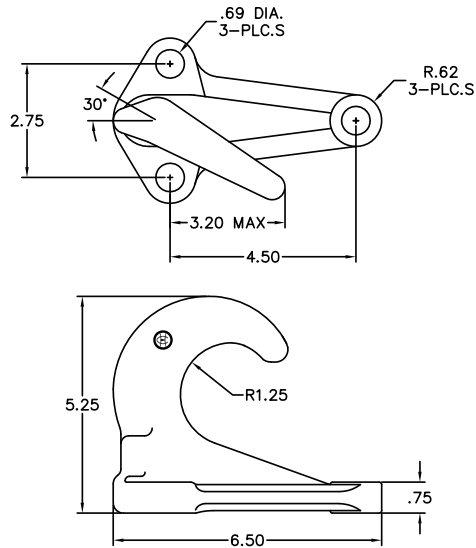

2801-GM

2801-GM, Universal Towing Hook

Universal hook is drop forged from quality-controlled steel. The short pad allows the hook to be mounted where space constricts the size of the hook that can be used for the application. Maximum working load 30,000 lbs.

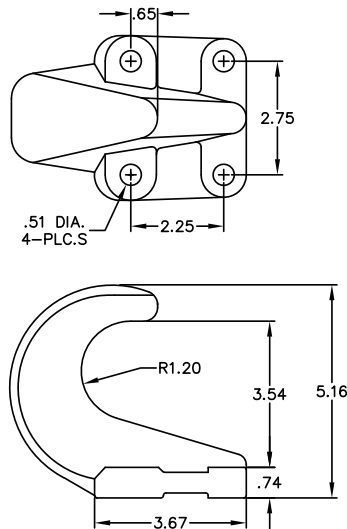

Note: Maximum working loads are given for use with SAE Grade 8 Fasteners. "Do Not" use a lesser grade fastener unless the maximum working load is reduced proportionally. This pertains to all Towing Devices shown in this catalog.