HINGES

EMBOSSED STEEL HINGES

Manufactured from high quality steel. Embossed for greater strength. For use on trailers and truck bodies. Has wide bracket with three mounting holes. Three strap lengths available. Hinges supplied with non-removable pin for maximum security. Also available with removable pins. To order removable pins add the letter R to the catalog number. Example: 2008-R.

Specifications:

Bracket — 8 Ga. x 4-1/2" x 3" from center of pin

Strap — 8 Ga. x 2" x 8", 12" or 16" as shown below

Pin — 1/2" Dia. steel

1/8" Shim available — See below No. 2000 Shim

ALSO AVAILABLE IN .160 ALUMINUM & 10 GA. PLAIN OR POLISHED STAINLESS STEEL




No. 2008 / 2008-SS

Flush — Strap 8" long Mounting holes for 5/16" bolts Finish — Steel - Zinc plated Stainless - Plain or polished








No. 2012 / 2012-SS

Flush — Strap 12" long Mounting holes for 5/16" bolts Finish — Steel - Zinc plated Stainless - Plain or polished







No. 2016 / 2016-SS

Flush — Strap 16" long Mounting holes for 5/16" bolts Finish — Steel - Zinc plated Stainless - Plain or polished Weight — 2-1/2 lbs.





For use with 2000 series hinges with wide bracket when 1/8" offset is required.

Finish — Zinc Plated



NARROW BRACKET SIDE & REAR DOOR HINGES

Manufactured from high quality steel. Strap is embossed for greater strength. Same basic hinge as Polar 2000 Series but features a narrow bracket for mounting where space is limited.

Specifications:

Bracket — 8 Ga. x 4-1/2" x 1-5/8" from center of pin

Strap — 8 Ga. x 2" x 8", 12" or 16" as shown below.

Pin — 1/2" Dia. steel


Finish — Steel - Zinc plated


Stainless - Plain or polished


ALSO AVAILABLE IN .160 ALUMINUM & 10 GA. PLAIN AND POLISHED STAINLESS STEEL









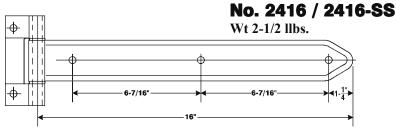

EMBOSSED OVER THE SEAL HINGES

Designed to bridge door molding or door seal. Manufactured from high quality steel. Embossed for greater strength. Three strap lengths available. All hinges supplied with non-removable pin for maximum security. Also available with removable pins. To order removable pins add the letter R to the catalog number Example: 2108-R.

Specifications:

Bracket — 8 Ga. x 4-1/2" x 3" from center of pin Strap — 8 Ga. x 2" x 8", 12" or 16" as shown below

Pin — 1/2 Dia. steel 1/8" Shim available

All mounting holes for 5/16" bolts.



ALSO AVAILABLE IN .160 ALUMINUM & 10 GA. PLAIN AND POLISHED STAINLESS STEEL

No. 2108 / 2108-SS





Flush — Strap 8" long

Weight — 2 lbs.


Finish — Steel - Zinc plated

Stainless - Plain or polished









No. 2112 / 2112-SS

Flush — Strap 12" long Weight — 2-1/4 lbs.

Finish — Steel - Zinc plated Stainless - Plain or polished



No. 2116 / 2116-SS

Flush — Strap 16" long Weight — 2-1/2 lbs. Finish — Steel - Zinc plated Stainless - Plain or polished